





IEX 6 is C13/C19 combination outlet P-LOCK and standard plug compatible

VIEW A

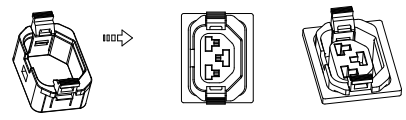


C13 locking, compatible with standard C14 plug, C14 V-Lock plug


C13 Lock Part

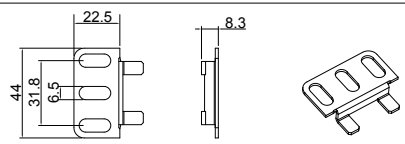

Mounting Bracket

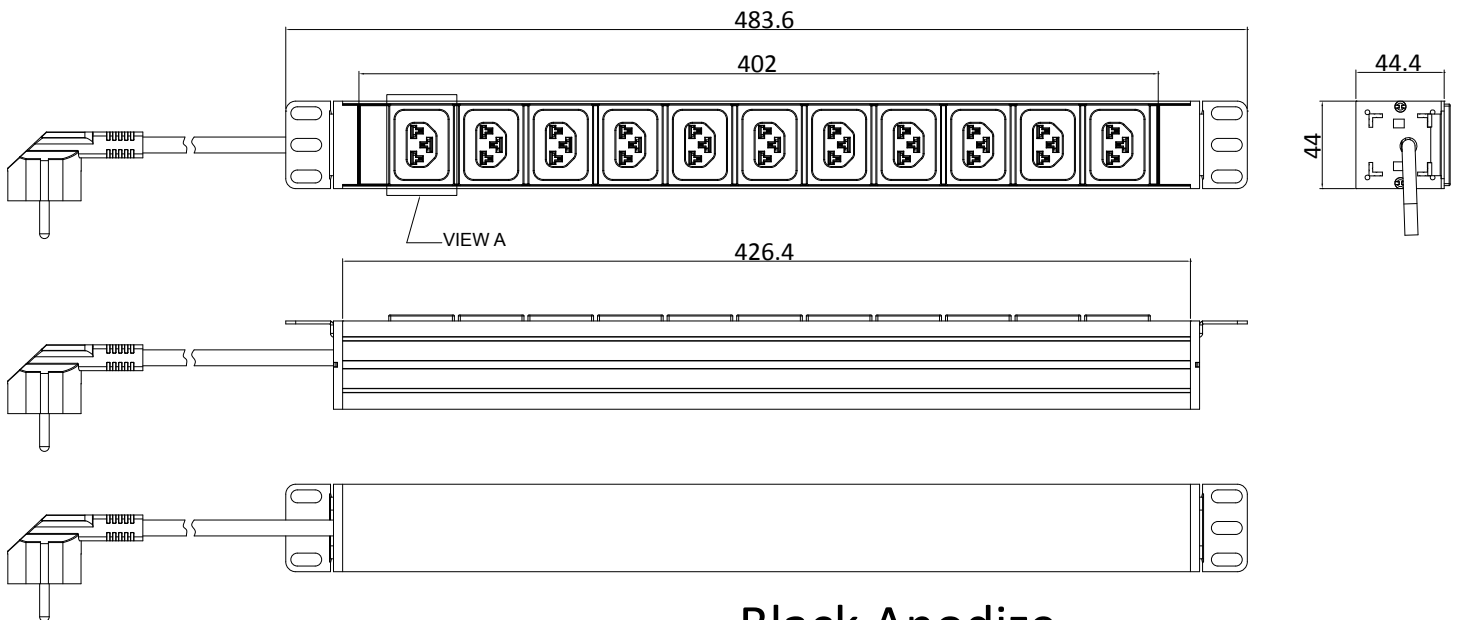



Packing content:

IEX Lock-VP  X11 Red

Black Anodize

Basic Series	OUTPUT	OPERATING TEMPERATURE
	(11) IECX (C13/C19) combo Black (Max rate 16A)	0° to 60°C
INPUT	BRANCH CIRCUITS	MOUNTING ACCESORIES
190-250VAC 16A 50HZ Schuko Plug 2m H05VV-F3G1.5mm² Power Lead		(2) Mounting Bracket

Revisions		
Rev	Description	Date

DRAWING TYPE	
 <small>(NO PERMISSION, NO CHANGING)</small>	
unit=mm	
TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE	
FILLET	R0.5
ANGLE	±0.5°
FIRST ANGLE	
	

PDU11EX	
Housing	Aluminium
	Black Anodize
DATE 29-07-2021	