UFGLULU62



Ultra Low Loss Singlemode, LC Uniboot to LC Uniboot, 2.0 mm Duplex Fiber Patch Cord, Low Smoke Zero Halogen/Riser

- Patch cords using Uniboot technology combine, modularity, flexibility with easy insertion and removal from connectivity
- Uniboot connectors feature an adjustable polarity via a manual and independent rotation of each single connector body without exposing the fibers
- Uniboot technology features a push-pull mechanism operated by squeezing the connector boot

Product Classification

Regional Availability

Asia | Australia/New Zealand | Europe | Latin America | Middle East

/Africa | North America

Portfolio CommScope®

Product Type Fiber patch cord, duplex

Product Brand SYSTIMAX ULL

Ordering NoteFor lengths greater than 999 ft (304 m), orders must be in meters | Minimum length

may vary based on cable configuration

General Specifications

 Color, connector A
 Blue

 Color, connector B
 Blue

 Interface, Connector A
 LC/UPC

 Interface Feature, connector A
 Uniboot

 Interface, Connector B
 LC/UPC

Interface Feature, connector B Uniboot

Jacket Color Yellow

Total Fibers, quantity 2

Dimensions


Cable Assembly Length, minimum (ft) 2
Cable Assembly Length, maximum (ft) 200
Cable Assembly Length, minimum (m) 1
Cable Assembly Length, maximum (m) 61

Diameter Over Jacket 2 mm | 0.079 in



UFGLULU62

Ordering Tree

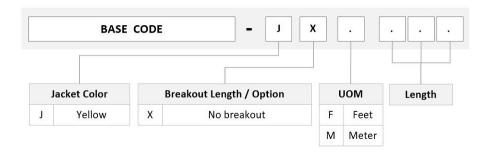

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.652.D | G.657.A2, TeraSPEED®

 Insertion Loss, maximum
 0.25 dB

 Return Loss, minimum
 50 dB

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Dual Rated LSZH/Riser

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

ROHS Compliant/Exempted





Included Products

760240253 N-002-MP-8G-F20YL Low Smoke Zero Halogen Riser Light Duty Interconnect Cable, 2 fiber

860650412

Page 2 of 3



UFGLULU62

..........

TeraSPEED® LC UniBoot 2.0MM UPC/LC UNIBOOT CONNECTOR
 KIT