




**PRODUCT DESCRIPTION**

RFS CDS\*-Hybrid-43 series Hybrid Combiner have been designed for a variety of wireless applications in the frequency band from 555 to 6000MHz. This series contains 2 product types: 2 by 2 and 4 by 4. The 2 by 2 Hybrid Combiner is four-port directional coupler which equally combines two wireless signals and transfers the combined signal to two output ports whilst the 4 by 4 Hybrid Combiner which equally combines four wireless signals and transfers the combined signal to four output ports. The broad frequency range is ideally suited for multi-band distributed antenna systems or in combination with RADIAFLEX® radiating cables.

**FEATURES / BENEFITS**

- **Broadband 555MHz-6000MHz**
- 4.3-10-female interfaces
- PIM optimized design (163dBc @ 2x43dBm)
- Ideal for all kind of DAS applications
- Low insertion loss
- High power handling
- Small size, low weight

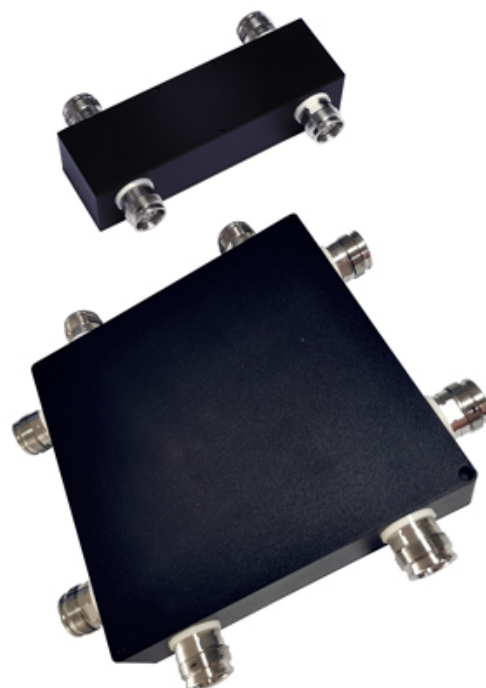

**TECHNICAL FEATURES**

**ELECTRICAL SPECIFICATIONS**

Frequency Range	MHz	555-6000
Power Rating	W	200
PIM 3rd @2*43 dBm	dBc	163
Input Impedance	Ohm	50

**MECHANICAL SPECIFICATIONS**

Connectors		4.3-10 Female
Temperature Range	°C	-25 to +65
IP Level		IP66
RoHS		Compliant



**MODEL NUMBER SPECIFICATIONS**

Model Number		<b>CDS2x2-43-555/6000</b>	<b>CDS4x4-43-555/6000</b>
<b>VSWR</b>		1.25	1.3
<b>PIM 3rd @2*43 dBm</b>	dBc	163	163@700&1.8GHz, 160@3.5GHz
<b>Coupling Tolerance</b>	dB	3.1dB ±1.1dB@0.555-0.65GHz 3.1dB ±0.8dB@0.65-6GHz	6.2dB ±1.5dB@0.617-5.95GHz 6.2dB ±2dB@0.555-0.617GHz 6.2dB ±2dB@5.95-6GHz
<b>Isolation</b>	dB	20dB@0.555-2.7GHz 21dB@2.7-6GHz	19dB@0.555-6GHz
<b>Dimensions, L*W*H</b>	mm (in)	145*79*36 (5.71*3.11*1.42)	239*239*35 (9.4*9.4*1.38)
<b>Net Weight, ±10%</b>	kg (lb)	0.56(1.23)	1.36(3)

**External Document Links**

[LINK to VEX FILES](#)

**Notes**