


Installation Cable Cat. 6, U/UTP, 4P, 250 MHz, LSZH, grey, Dca, 305 m

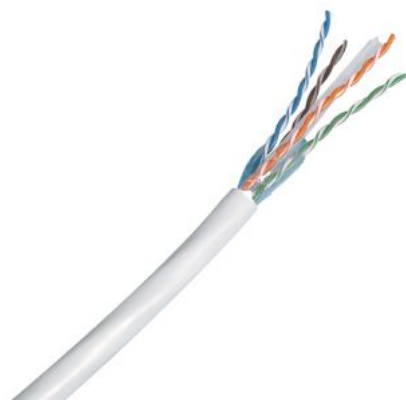

010.1560 / similar product

DESCRIPTION

Installation cable for generic cabling systems. Cat. 6, U/UTP cable. 100 Ohm impedance. Data transmission frequencies of up to 250 MHz.

TECHNICAL DATA

DESCRIPTION	VALUE / VALUE RANGE
Cable type	Single cable
Cable design	normal
Cable application	indoor use
Cable length	1000 ft
Armor	No protection
Outer sheath material	LSZH
Cable sheath characteristics	zero-halogen
Wire type	Wire
Number of wires	8
Category	Cat. 6
Stranding	4 pairs
Wire diameter	AWG 24
Shielding	U/UTP
Cable overall diameter	Ø 5.3 - 6.2 mm
Max. test frequency	250
PoE	Yes
PoE Level	4
CPR classification	Dca
Standard	ISO/IEC 11801

MECHANICAL DATA

DESCRIPTION	VALUE / VALUE RANGE
Color Code RAL	7035 Light gray
Cable Length	305 m / 1000 ft