

Pigtails LC/SC, UPC/APC

Single mode, Multi mode.


Product Features:

- 1,8 mm standard cables
- Free of halogen (LSZH)
- Solid no-nonsense design
- ECS^{DK} = Quality products based on 20 years of experience



Technical data

Specification	Value
Cable diameter (Ø)	0.9mm
Polarity grade	Grade B
Operating temperature	-40~75°C
Maximum pulling force	6N
Material	Flame retardant
Halogen free	Yes
Polishing	UPC/APC
Connector standard	SC: TIA/EIA, FOCIS3, GR-326.NTT-SC IEC61754-4 and JIS C5973. LC: TIA/EIA, FOCIS10, GR-326 EIA/TIA-604-10, IEC61754-20 and JIS C5973.

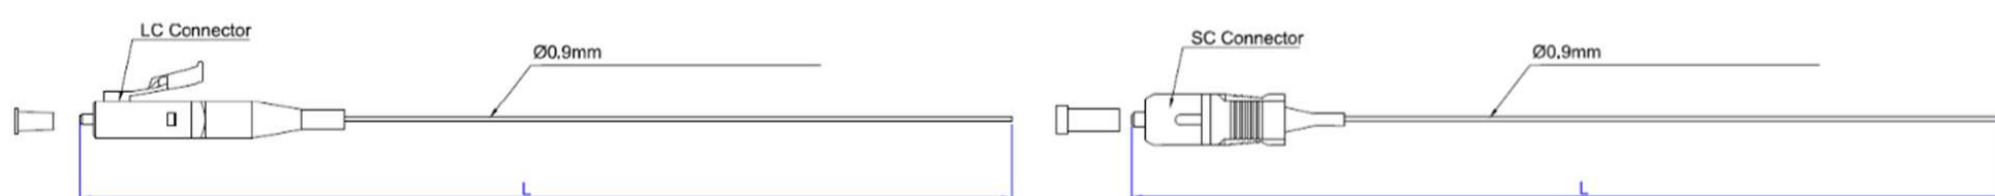

Optical values

Type	Measurement method (IL/RL)	IL (dB)	RL (dB)
SM- APC	IEC 61300-3-35:2015	≤0.25dB	≥60dB
SM- UPC	IEC 61300-3-35:2015	≤0.25dB	≥50dB
OM3 - UPC	IEC 61300-3-35:2015	≤0.25dB	≥35dB
OM4 - UPC	IEC 61300-3-35:2015	≤0.25dB	≥35dB